"Easy"

Five Steps to Hardscape Restoration



THEY ARE EVERYWHERE... Hardscapes in Desperate Need of Restoration



- Original Beauty Lost
- Lack Curb Appeal
- Overtaken By Weeds & Insect Infestation





"Common"

Problems



✓ Dirty & Stained Pavers



✓ Spreading & Sunken Pavers



"Common" Problems



- ✓ Loss of Joint Sand
- ✓ Faded & Worn Out Looking Pavers



STEP 1: Make Necessary Repairs







- Remove Sunken Pavers
- Add Base Material to Make Level Again



STEP 1: Make Necessary Repairs





- Replace Pavers
- Install Edge Restraint to Prevent Future Spreading If Not Installed Originally



STEP 2: Complete Spot Cleaning



 Remove Any Stains Such as Oil, Food, Rust, etc Before Cleaning Overall



STEP 3: Perform Overall Cleaning







- Apply a Multi-Purpose Cleaner to Remove Embedded Dirt & Prepare Surface for Sealing
- Use a Flat Surface Cleaner for Consistent Results
- Power Wash to Remove Remaining Dirt, Joint Sand & Cleaner



Before & After Cleaning















STEP 4: Install Joint Sand

- Allow Surface to Dry 24 Hours After Cleaning or Rain Before Installing Sand
- Use ASTM C-144 Joint Sand for Joint Stabilization with a Stabilizing Sealer
- Compact to Eliminate Voids in Joints
- Blow Off Remaining Dust & Sand










STEP 5: Apply Sealer

- Flood Coat Sealer Onto Surface Focusing on Joints
- Squeegee Excess Into Joints
- Protect Surrounding Areas & Nearby Building
- Keep Traffic Off of Freshly Sealed Surface






After Sealing

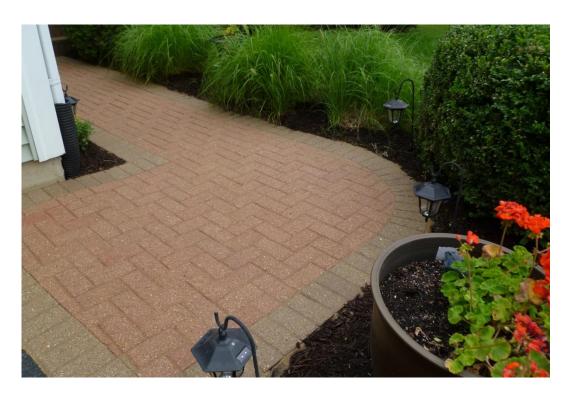



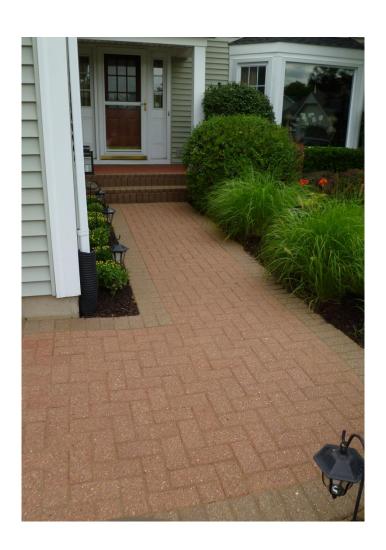

After Sealing





HARDSCAPE RESTORATION



